

Series SWMK

Motor type 404 203

Design Data	
Commutation	Brushed
Direction of rotation	Bi-directional
Bearing type	




Performance data		
Rated voltage [V]	U_N	24
Nominal torque [Nm]	M_N	1.00
No-load speed [min^{-1}]	n_0	264.0
Nominal power [W]	P_N	23.2
Nominal current [A]	I_N	4.0
Nominal force [kN]	F_N	0.00
Duty cycle	s1	

Sensor data	
Pulses	10.25
Output channels	1




Other data	
Gear ratio	41/4
Gear wheel material	Plastic
Suppression components	
Enclosure class	IP30
Weight [kg]	1.200

Remarks:


Motor picture

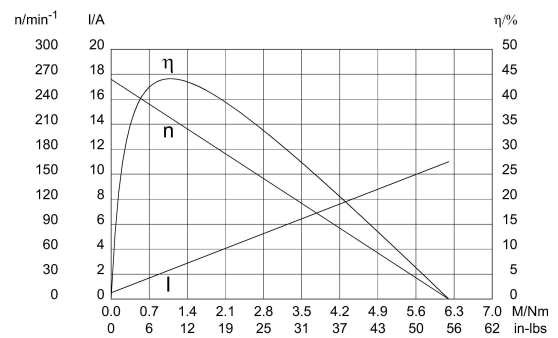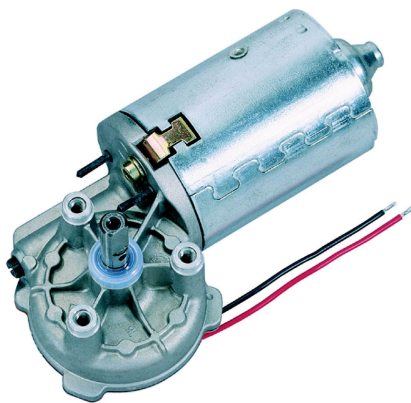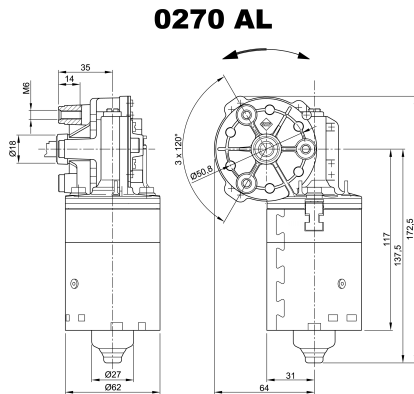


Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)



Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)



- I Panduit MLSS 100-03
- II Gegenstecker: Panduit CE 100 F22-03

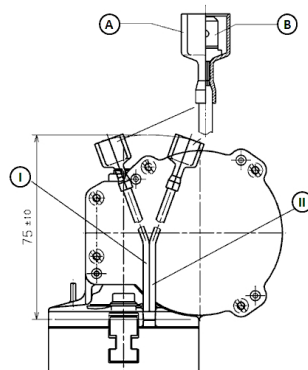

A: housing MST AMP No. 2-521055-2

B: spade terminals 6.3 x 0.8 DIN 46 244

l: red

II: green

Notes

This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.