

Design Data	
Commutation	Brushed
Direction of rotation	Bi-directional
Bearing type	A:Sleeve - B:Sleeve


Performance data		
Rated voltage [V]	U_N	24
Nominal torque [Nm]	M_N	0.12
No-load speed [min^{-1}]	n_0	5,250.0
Nominal power [W]	P_N	58.8
Nominal current [A]	I_N	4.0
Nominal force [kN]	F_N	0.00
Duty cycle	s1	

Sensor data	
Pulses	0
Output channels	0

Other data	
Gear ratio	
Gear wheel material	
Suppression components	5 μ H, 1nF
Enclosure class	IP 30
Weight [kg]	0.900

Remarks:


0272 A

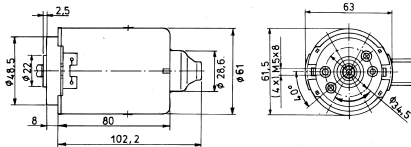

Motor picture




Characteristic curves

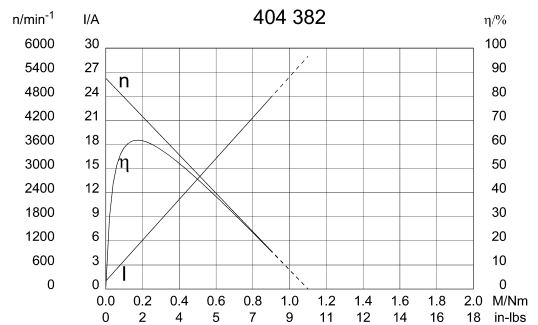


Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)


W 232

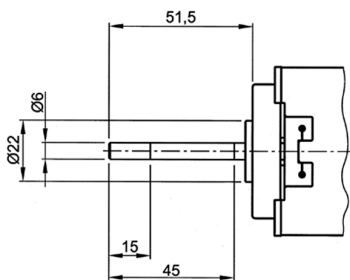

S 30



K 190



- I Receptacles for tabs 2,8 x 0,8 DIN 46 247
- II black
- III red