


Series SWMP

Motor type 404 003

Design Data	
Commutation	Brushed
Direction of rotation	Bi-directional
Bearing type	

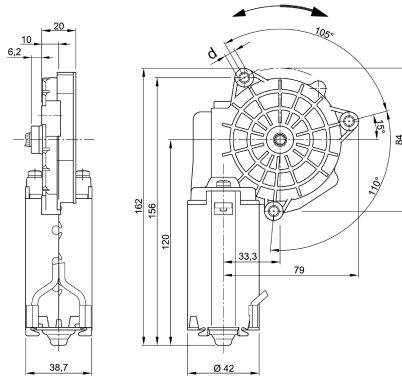



Performance data		
Rated voltage [V]	U_N	24
Nominal torque [Nm]	M_N	2.00
No-load speed [min^{-1}]	n_0	50.0
Nominal power [W]	P_N	8.98
Nominal current [A]	I_N	2.5
Nominal force [kN]	F_N	0.00
Duty cycle	s1	

Sensor data	
Pulses	0
Output channels	0




Other data	
Gear ratio	99/1
Gear wheel material	Resinbonded fabric
Suppression components	
Enclosure class	
Weight [kg]	0.710

Remarks: d = M6, Ball bearing


Motor picture

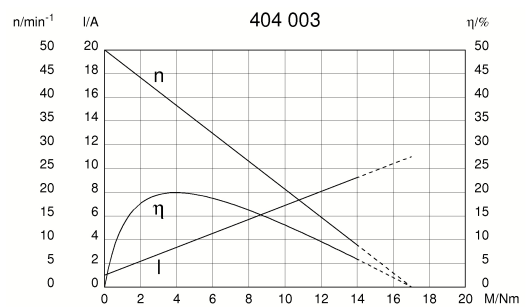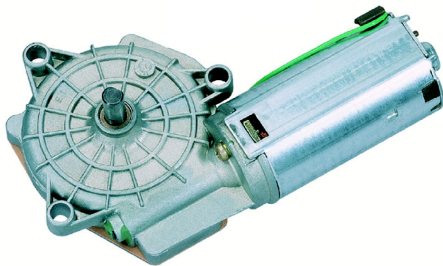

Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)

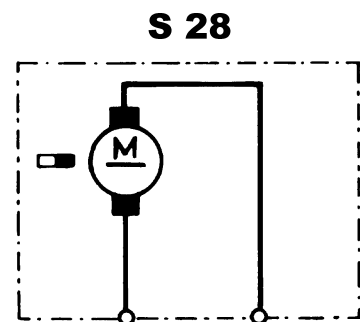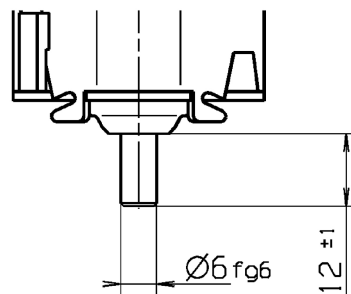

Output shaft drawing (W), Wiring diagrams (S) and Connector layout (K)



I: Housing RDST OCE: 2645082

II: Pins RD OCE: 2642354

Notes

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and extend across the width of the page. There are no margins, text, or other markings on the paper.